

Door Banner Instructions

Supplies needed:

- fabric of your choice (2 pieces 12" x 15")
- iron on interfacing (2 pieces 12" x 15")
- 12 in dowel rod 1/4" diameter
- ribbon or twine (appx 24" long)



1. Cut 2 of fabric 12in x 15in
 2. Cut 2 of interfacing 12in x 15in
-


3. Iron on interfacing to the wrong sides of your two fabric pieces.




-
4. Align your two pieces of interfaced fabric, right sides together, measure 5in up each side (15in side), and draw a line to meet at the bottom middle. Cut those corners off to make your banner shape.



5. Pin fabric right sides together.

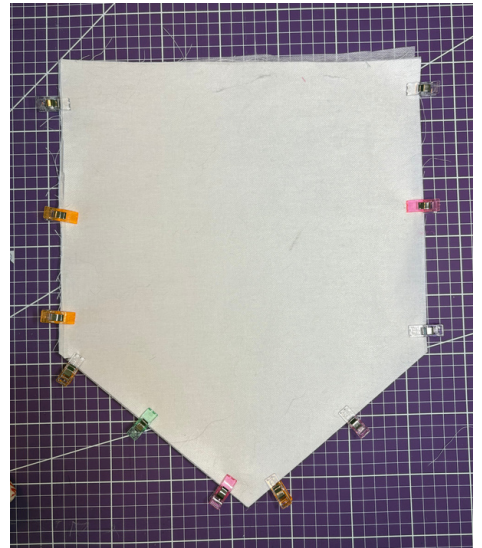


6. Using $\frac{1}{4}$ in seam allowance, sew sides together as shown in pic. The top edge will remain open.

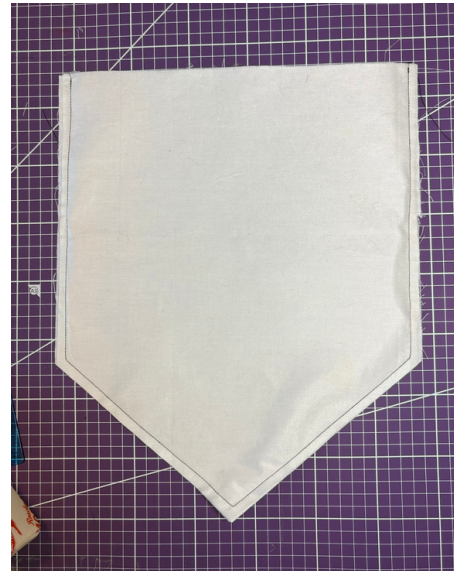


7. Trim seams and clip the points, careful not to cut the stitches.





8. Turn fabric right side out and use a chopstick or turner to push the bottom three points out. Iron.

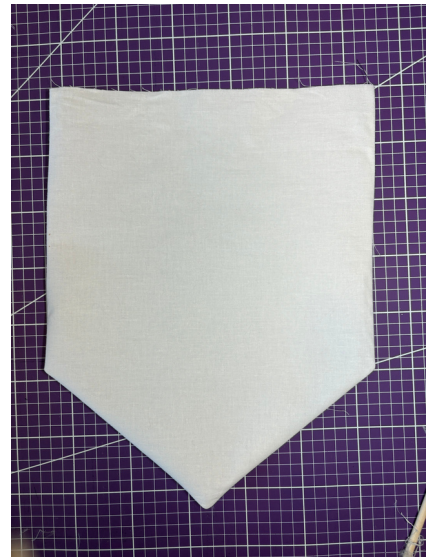

9. Top stitch close to the edge along the three sewn sides. Top will still remain open.

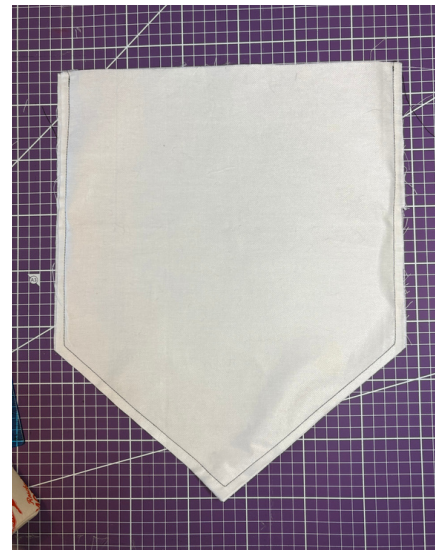

10. Fold top edge down $\frac{1}{4}$ inch, press. Fold over another $\frac{1}{2}$ inch, making space for your dowel rod. Press and sew down close to folded edge.

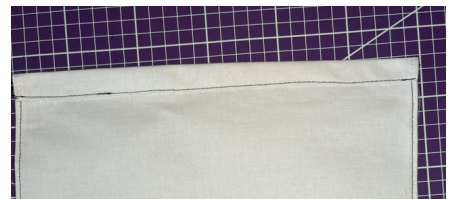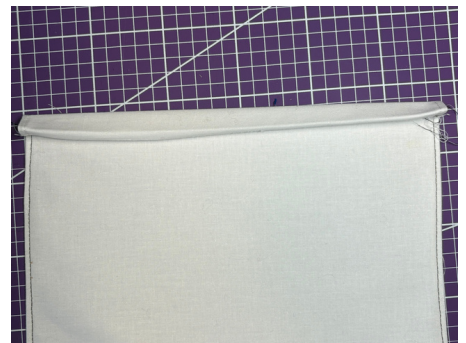

11. Slide dowel rod through the opening you created



12. tie ribbon around the edges, you can secure it with hot glue, or if you have a small drill bit to make holes on the edges of your dowel, tie the ribbon through the holes.



FINISHED BANNER!

